

CAMSO WHL 753R

FORMERLY SOLIDEAL SRGP



WHEEL
LOADERS



MOTOR
GRADERS



ARTICULATED
DUMP TRUCK



RADIAL PERFORMANCE, VERSATILITY AND DURABILITY

Delivers excellent performance, versatility and durability. With enhanced stability, ride quality and traction, it's the best choice for both one-star and two-star applications.

camso.co

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO WHL 753R



HEAVY-DUTY DUAL-STAR CARCASS

- Enhances stability and suitability for both one-star and two-star applications

OFFSET, TAPERED TREAD LUGS

- Reduces vibration for improved ride quality



OPTIMIZED TREAD PATTERN

- Provides excellent durability and low wear rate


NON-DIRECTIONAL STEPPED DESIGN

- Enhances cleanout for improved traction

TIRE SIZE	TYPE	RIM SIZE	TIRE DIMENSIONS			APPLI-CATION	SI	LI	INFLATION PRESSURE [KPa] [PSI] AND LOAD CAPACITY [kg] [lb]													
			O.D. [mm] [in]	O.W. [mm] [in]	O.T.D. [mm] [32nd]				KPa	200	250	300	350	400	450	500	550	600	650			
			PSI	29	36				44	51	58	65	73	80	87	94						
17.5R25	TBL5	14.00/1.5	1342	447	26	Loader*	A2	176/182	kg	3650	4250	4850	5600	6000	6500	7100	7500	8000	8500			
							B	157/167	kg	-	-	3550	4000	4375	4750	5150	5450 (5.25)	-	-			
						Grader*	A8	153	kg	2650	3075	3650	4000	4375	4750	-	-	-	-			
			20.5R25	TBL5	17.00/2.0	1483	512	31	Loader*	A2	186/193	kg	4750	5600	6300	7100	8000	8750	9500	10000	10900	11500
										B	168/177	kg	-	-	4750	5300	5800	6500	6900	7300 (5.25)	-	-
									Grader*	A8	161/170	kg	3450	4125	4625	-	-	-	-	-	-	-
23.5R25	TBL5	19.50/2.5	1615	624	33	Loader*	A2	190/201	kg	6000	7100	8250	9250	10300	11200	12150	12850	13600	14500			
							B	176/185	kg	-	-	6000	6700	7500	8250	9000	9250 (5.25)	-	-			
						Grader*	A8	161/170	kg	4500	5300	6000	-	-	-	-	-	-	-	-		
			26.5R25	TBL5	22.00/3.0	1746	704	37	Loader*	A2	202/209	kg	7500	9000	10300	11500	12850	14000	15000	16000	17000	18500
										B	184/193	kg	-	-	7500	8500	9500	10300	11200	11500 (5.25)	-	-
									EM**	B	184/193	lb	-	-	16500	18700	20900	22700	24700	25400 (76)	-	-
29.5R25	TBL5	25.00/3.5	1870	782	38	Loader*	A2	208/216	kg	-	-	-	-	15500	17000	18000	19500	20600	22400			
							B	191/200	kg	-	-	9250	10300	11500	12500	13600	15000 (5.25)	-	-			
						EM**	B	191/200	lb	-	-	20400	22700	25400	27600	30000	33100 (76)	-	-			


NEW TIRE

Lug-to-void: 55%

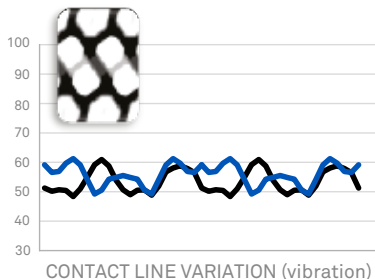

25% WORN TIRE

Lug-to-void: 65%

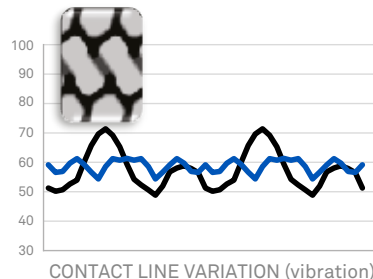

■ CAMSO WHL 753R

■ COMPETITOR 1

Patented tread design to minimize vibrations: Poor ride quality caused by high vibration when operating on hard surfaces can affect operator comfort and overall machine performance. The Camso WHL 753R provides **improved ride quality** throughout its tread life.

AUTHORIZED DISTRIBUTOR:

camso.co

