

CAMSO SKS 793S



SKID STEER
LOADERS



SEVERE-DUTY AND FLAT-FREE .

Next-generation versatile solid tire solution. Engineered to deliver excellent ride quality and best durability for mixed and hard surface skid steer applications.

camso.co

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE



TRACTION



CAMSO SKS 793S



INNOVATIVE NON-DIRECTIONAL TREAD PATTERN

- Provides greater durability and versatility for mixed and hard surface applications

NEW ELONGATED APERTURE DESIGN

- Provides excellent ride quality and reduces cracking

REUSABLE WHEEL


- Provides lower cost per hour and quicker installation

MASSIVE TREAD DEPTH

- Improves durability for longer service life

TIRE SIZE	RIM SIZE	ACTUAL TIRE DIMENSIONS			HEEL		LOAD CAPACITY [kg] [lb]						
							Counterbalanced lift trucks				Other vehicles		
		Load wheel		Steering wheel									
		O.D. [mm] [in]	O.W. [mm] [in]	O.T.D. [mm] [32nd]	Normal	Quick	15 km/h 9 mph	25 km/h 16 mph	25 km/h 16 mph	6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph
31x10-20 (10-16.5)	7.50	780	233	39	-	■	-	4030	3100	4030	3660	3100	4680
		30.7	9.2	49			-	8885	6835	8900	8100	6850	10350
33x12-20 (12-16.5)	7.50	830	285	39	-	■	-	5200	4000	5200	4720	4000	6040
		32.7	11.2	50			-	11465	8820	11500	10400	8850	13350
36x14-20 (14-17.5)	7.50	910	322	52	-	■	-	6175	4750	6175	5605	4750	7175
		35.8	12.7	66			-	13650	10500	13650	12350	10500	15850

EXTRAPOLATED TREAD LIFE COMPARISON

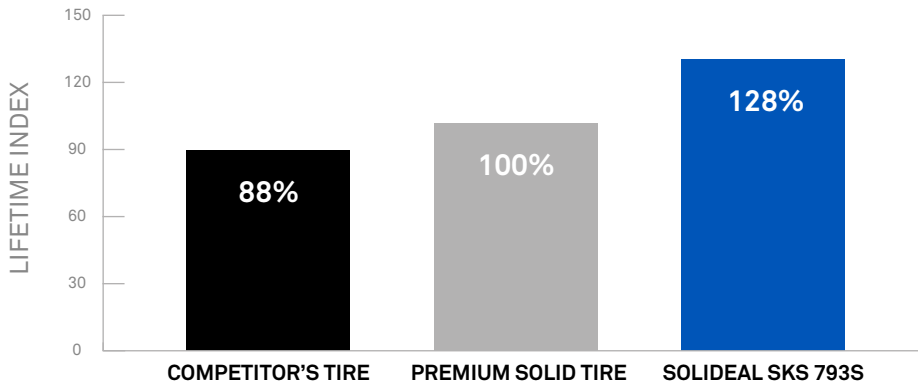

Internal testing under controlled conditions demonstrated a 40% tread life advantage over a competitor's solid skid steer tire

AUTHORIZED DISTRIBUTOR:

camso.co

